


Monocrystalline photovoltaic panel **30W**



Power Tolerance: +3%

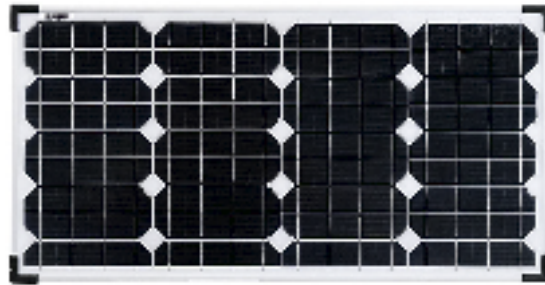

Independently researched anti-reflective and self-cleaning glass surface reduces energy loss from dirt and dust.




Excellent low light performance, creates a better kWh/kW ratio and produces an average of 2-3% more electricity.

Certification



ROHS

Monocrystalline photovoltaic panel 30W

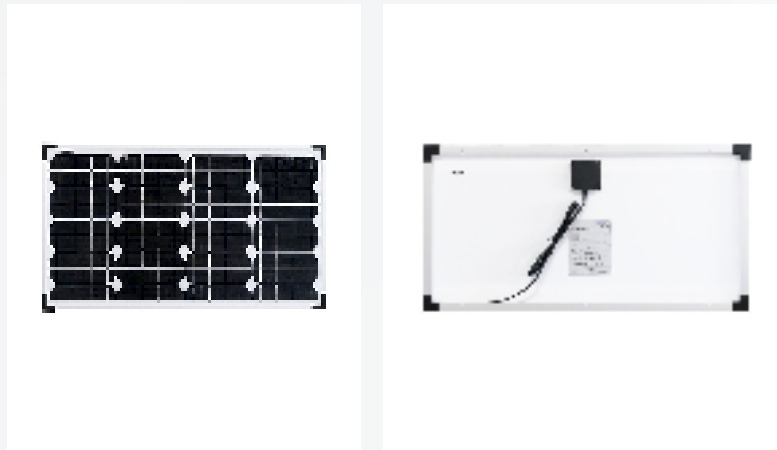

Technical characteristics – Monocrystalline photovoltaic panel 30W

Cell type	Monocrystalline
Number of cells	20 pcs.
Size	660×333×20mm
Front Glass	3.2mm low iron tempered glass
Frame	Anodized aluminum alloy
Connector	Compatible with MC4
Output cables	Length 1.0m
Weight	2.05 kg.
Maximum power STC (Pmax)	30 W (+/-5%)
Short circuit current (Isc)	1.68v A
Open Circuit Voltage (Voc)	21.5 V
Maximum Power Voltage (Vmp)	18 V
Work temperature	-40 to +85 °C
Storage temperature	-40 to +85 °C

