


Monocrystalline photovoltaic panel **80W**



Power Tolerance: +3%

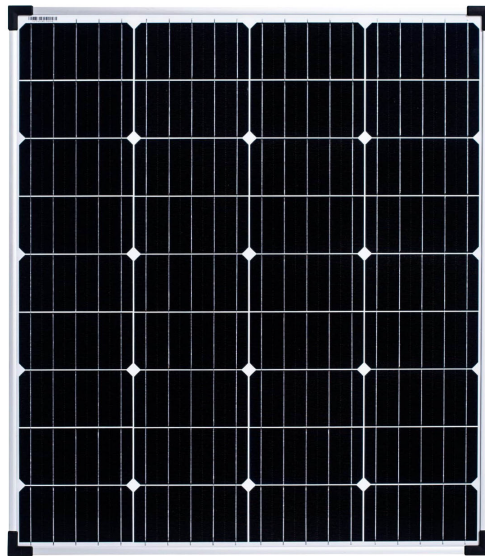

Independently researched anti-reflective and self-cleaning glass surface reduces energy loss from dirt and dust.




Excellent low light performance, creates a better kWh/kW ratio and produces an average of 2–3% more electricity.

Certification



ROHS

Monocrystalline photovoltaic panel 80W

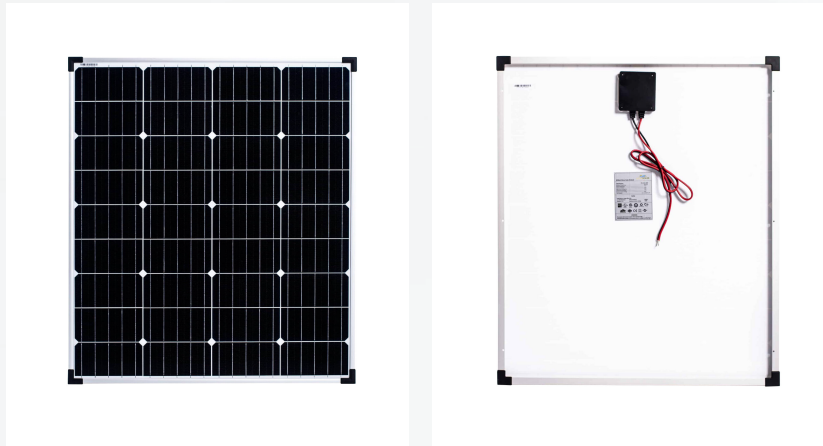

Technical characteristics – Monocrystalline photovoltaic panel 80W

Cell type	Monocrystalline
Number of cells	36 pcs.
Size	770×670×20mm
Front Glass	3.2mm low iron tempered glass
Frame	Anodized aluminum alloy
Connector	Compatible with MC4
Output cables	Length 0.9m
Weight	5,0 кг.
Maximum power STC (Pmax)	80 W (+/-5%)
Short circuit current (Isc)	4.90 A
Open Circuit Voltage (Voc)	21.6 V
Maximum power current (Imp)	4.55 A
Maximum Power Voltage (Vmp)	17.6 V
Work temperature	-40 to +85 °C
Storage temperature	-40 to +85 °C

670mm ± 2

20mm 670mm ± 2

